




UPS26-99SF 115V 60 Hz

PN: 98961763

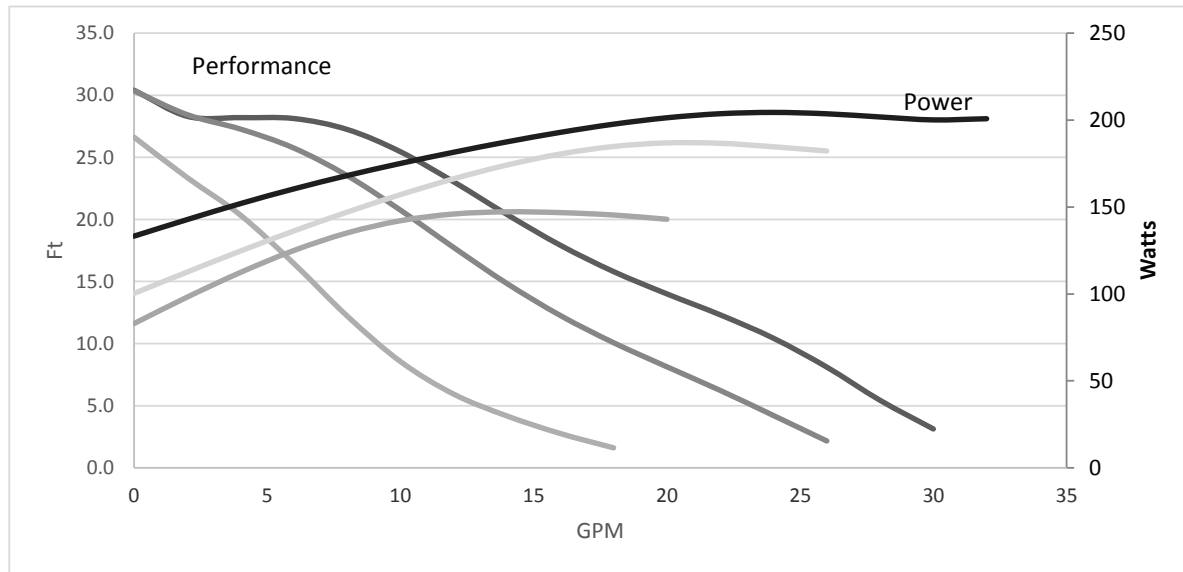

Approvals:



Flow range:

0-30 gpm

Head range:

0-32 feet

Motor:

2-pole, single phase

Internal check valve:

Optional

Max. liquid temperature:





230°F (110°C)

Min. liquid temperature:

32°F (0°C)

Max. system pressure:

145 psi



Pictures and dimension for reference only. Terminal box shown as 3 speed